

DRYING CABINET

DC RANGE DC4

UP TO 6KG UP TO 13LB



FEATURES

- New attractive design
- New dimensions (more compact)
- New control (6 automatic programs and time drying)
- Increased capacity up to 6kg
- Increased heat power
- Better airflow allowing shorter drying times
- Flexible construction allows hanging bars to slide easily forward for easy access to garments or down for more space.
- Easy to install; the evacuating channel is connected to the ventilation system and the humid air is transported out of the room.
- All electrical components are placed on the top which makes it easy to maintain.
- Pull-out hanging system
- 3 temperatures: HIGH, LOW, ECO+
- Energy efficient
- Overheat protection
- IP 24 classification
- CE approved


MARKETS

Day care center, Schools, Road workers Dressing rooms, Ships, Airports, Ski resorts, Campings, Security

MAIN SPECIFICATIONS		DC4
Loading capacity	kg/lbs	Up to 6kg/13 lbs
Drying capacity	g/min*	25
Hanging length	m/feet	16/52,5
Drying time, HIGH temp (max 70°)	min	85
Drying time, ECO+ (no heat)	min	600
Heating effect	kW	2
Total effect	kW	2,038
Energy consumption HIGH temp /kg	kWh	0,64
Energy consumption ECO+ (no heat)	kWh	0,1

^{*}Valid for textile spun at high speed

TECHNICAL SPECIFICATIONS		DC4
ELECTRICAL CONNECTIONS		
Electrical connection		1N, 230V 50-60Hz
Fuse	А	10
Total effect	kW	2,038
Heating elements	kW	2,0
AIR CONNECTIONS		
Outlet exhaust	Ø mm/inch	100/3,94
Outlet air flow	m³/h	95
Pressure drop	max Pa	N/A
Dewatering capacity	g/min	25*
SOUND LEVEL		
Airborne sound level	dB(A)	55
SHIPPING DATA		
Net	kg/lbs	N/A
Crate	kg/lbs	N/A
Shipping data net	kg/lbs	N/A
Shipping volume	m³	N/A
DIMENSIONS		
Width	mm/inch	595/23,4
Depth	mm/inch	610/24
Height	mm/inch	1900/74,8
Weight	kg/lb	61/134,5

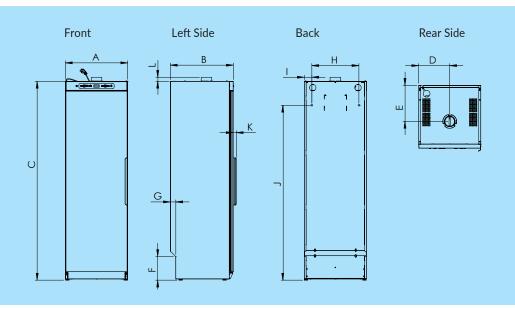

	(mm)	
Α	595	
В	610	
C	1900	
D	297	
Е	348	
F	227	
G	52	
Н	450	
I	73	
J	1674	
K	31	
L	39	

