

## INDUSTRIAL TUMBLE DRYER

T  
RANGE

T 11 HP	T 13 HP	T 16 HP
11KG 77LB	13KG 53LB	16KG 77LB




### FEATURES

- Heat pump
- Standard galvanized drum with large diameter
- Easy to use microprocessor (Easy)
- RADAX® Combination of Radial and Axial airflow:
  - Maximal heat transfer
  - Low energy consumption
- Large drain valve (Ø 76 mm)
- Large door opening for easy loading & unloading
- Self cleaning lint screen

### OPTIONS

- Stainless steel side front
- Stainless steel drum
- Reverse drum
- Full Control programmer (FCT)
- Residual moisture control Sensodry®:
  - safe drying of delicate linen
  - humidity detection in %
  - ideal in combination with SoftWash®
  - ideal for dry cleaners, fire dept.
  - available on Easy and Full Control
- Coin operated version
- Wireless communication with cloud-based systems (WiFi kit - to order through Accessories)



STANDARD  
STAINLESS STEEL  
DRUM



HEAT PUMP




ENERGY  
EFFICIENT

TYPE		T11 HP	T13 HP	T16 HP
<b>CAPACITY</b>				
Capacity 1:18	kg (lb)	12(26)	16(35)	19(42)
Capacity 1:22	kg (lb)	11(24)	13(29)	16(35)
Drum volume	l	250	285	345
Drum diameter	mm	Ø 760	Ø 760	Ø 760
<b>DRYING AVERAGE</b>	<b>g/min</b>	126	120	120
<b>MOTORS</b>				
Fan	kW	0,30	0,30	0,30
Drive	kW	0,25	0,25	0,25
<b>HEAT PUMP</b>				
Electrical connection				
Energy	kW	2,9	2,9	2,9
<b>PROGRAMMER</b>				
Easy control - antivandal (ECT)		Standard	Standard	Standard
Full control (FCT)		Available	Available	Available
<b>DIMENSIONS</b>				
H×W×D	mm	1680x795x1525	1680x795x1615	1680x795x1735
Net weight	kg	350	360	375
<b>TRANSPORT DATA</b>				
Packed H×W×D	mm	1785×855×1540	1785×855×1635	1785×855×1750
Gross weight	kg	385	400	400



Energy consumption comparison - conventional dryer vs. heat pump dryer

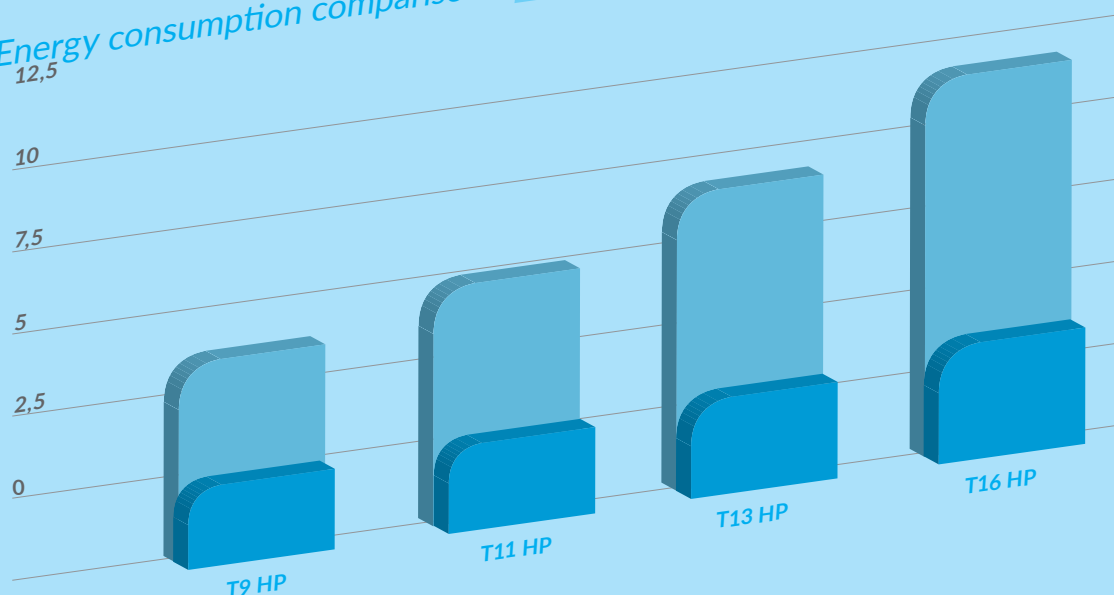

WATCH THE T HP VIDEO

[www.bit.ly/videoevo4](http://www.bit.ly/videoevo4)

